

Single Phase Off-grid Inverter

MAXHUB



PV800-12 S1.2



Built-in 50A
Solar Charger



PV Input Voltage
Range 17-115V



Pure Sine Wave

LCD

LCD Display

BMS

Support Lithium/
Lead-acid Battery



Lithium Battery
Activation

PF

Power Factor 1.0




Detachable
Dust Cover



WiFi
Monitoring(optional)

System Diagram

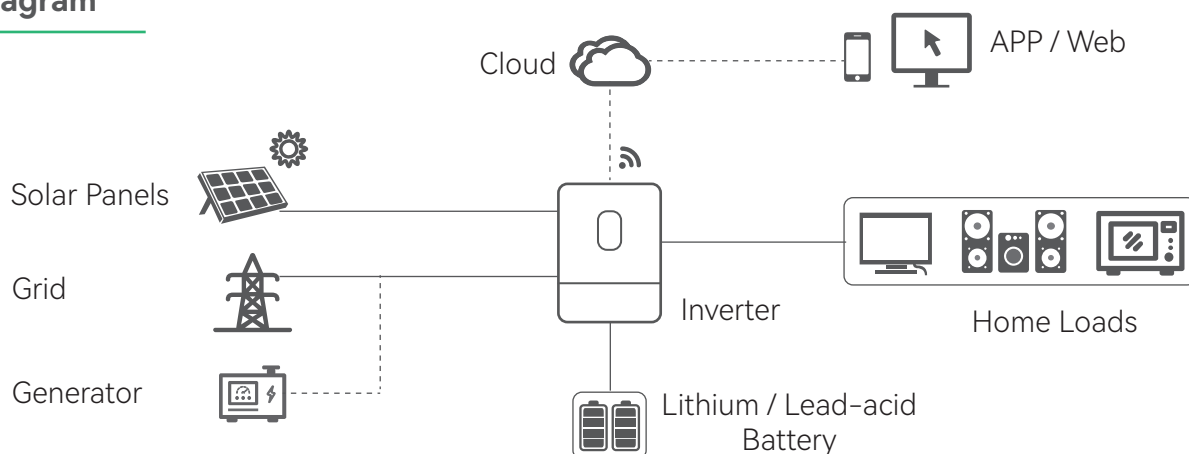

Specifications

Model	PV800-12 S1.2
AC Input	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
AC Output	
Rated Capacity (kW)	1.2
Surge Power (kVA)	2.4
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (APP/UPS/GEN mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	60s@102%-120% load; 10s@120%-200% load;
Max. Efficiency (Battery Mode)	90%@12VDC
Parallel Quantity	NA
Charger (PV / AC)	
Solar Charger Type	MPPT
Max PV input current / power	18A / 800W
MPPT Range@Operating Voltage (VDC)	17-115
Max PV Open Circuit Voltage (VDC)	115
Max PV Charge Current (A)	50
Max AC Charge Current (A)	50
Max. Charge Current (PV + AC) (A)	100
Battery	
Normal Voltage (VDC)	12
Floating Charge Voltage (VDC)	13.8
Overcharge Protection (VDC)	15
Battery Type	Lead-acid / Lithium
Interface	
HMI	LCD
Interface	RS232 / RS485 (optional) / CAN (optional)
Monitoring	Wifi(optional)
General Data	
Ingress Protection	IP21
Operating Temperature	-10 °C - 60 °C
Relative Humidity	5% - 95% (Non-condensing)
Storage Temperature	-15 °C - 60 °C
Net Weight (kg)	3.5
Dimensions (H*W*D)	301*217*97mm
Max. Operating Altitude	4000m (Derating above 1000m)
Activation	
AC Activation	YES
PV Activation	YES